




The MicroJet™ is designed for blowing or floating telecommunication micro-cables (optical fibre, coax or multipair) in preinstalled ducts.

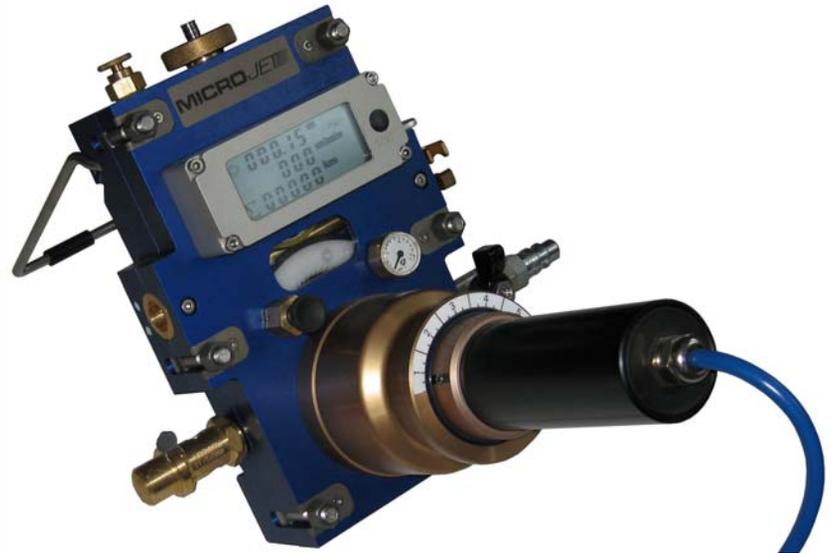

Standard equipment:

- 1 box for the MicroJet and its accessories
- 1 set of tools
- 1 speed and distance indicator
- 1 air hose with quick release coupling Mody to connect the compressor
- 1 remote electrical speed and direction control box with power supply wire and control wire
- 1 bottle of lubricant Micro jetting lube
- 1 operation and maintenance manual

Standard version	Microjet
Type	EM-25
Cable dia. [mm]	< 3.0
Duct OD [mm]	3.0-8.0
Drive unit	Electric
Pushing force [N]	25
Radial pressure on cable [N]	20-100
Max. speed [m/min]	50
Recommended speed [m/min]	30-40
Max. air pressure [bar]	16
Dimension of apparatus l x w x h [mm]	285 x 250 x 290
Dimension of apparatus with case l x w x h [mm]	600 x 400 x 340
Weight of machine [kg]	6.5
Total weight [kg]	18.5

Specifications are subject to change without notice

MAIN ACCESSORIES



Lubricator L9,
for the continuous lubrication of cables
for a better Jetting performance



Micro Jetting Lube,
lubricant improving Jetting performance



Figarino,
intermediate cable storage system,
avoiding figure of 8